



GF200

**COMBI
FURNACE**
HOT WATER AND FORCED AIR
ALL IN ONE



EMBRACE A NEW DIMENSION OF COMFORT



EASY INSTALLATION

- TWO APPLIANCES IN ONE FOR QUICKER AND CLEANER INSTALLATION
- SIGNIFICANT SPACE SAVINGS
- ONE MANUFACTURER, ONE WARRANTY

SMART EFFICIENCY

- ENERGY BILL REDUCTION
- EXTRA QUIET OPERATION
- LOW NO_x
- BEST IN CLASS ENERGY EFFICIENCY 97% AFUE

SUPERIOR QUALITY

- INTERNAL RECIRCULATION AND BUFFER TANK FOR QUICK DELIVERY
- MOST ADVANCED NEW GENERATION ECM MOTOR AND BLOWER FOR WHISPER QUIET PERFORMANCE
- STAINLESS STEEL HEAT EXCHANGERS FOR MAXIMUM DURABILITY



GREEN FURNACE[®] TECHNOLOGY

INTEGRATED OPERATION


GF200 ENABLES SPACE HEATING AND HOT WATER TO WORK EFFICIENTLY, SIMULTANEOUSLY AND AUTOMATICALLY MANAGING PRIORITIES

ULTRA SMOOTH COMFORT

THE INNOVATIVE ALGORITHM OF THE GF200 PROVIDES 10-STAGE MODULATION FOR SMOOTH TEMPERATURE CONTROL AND EXTREMELY QUIET AND EFFICIENT HEAT DELIVERY

AIR CONDITIONING

THE GF200 IS DESIGNED TO MANAGE AIR CONDITIONING AND HEAT PUMP IN THE MARKET, WITH SIMPLE AND EASY INTEGRATION

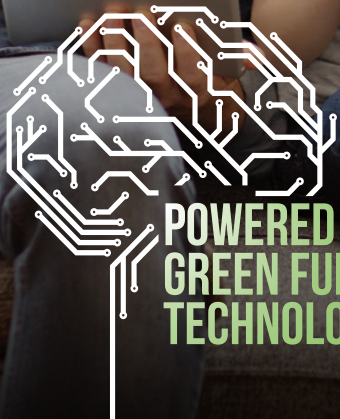

POWERED BY
GREEN FURNACE[®]
TECHNOLOGY

HEAT CAPACITY (INPUT)	NATURAL GAS	19,900 - 80,000 BTU/H	19,900 - 199,900 BTU/H
	PROPANE GAS		
ENERGY EFFICIENCY	AFUE	97.1%	
	UEF		0.96
	EF		0.97
HOT WATER FLOW RATE	50 °F (28 °C) TEMP RISE		7.8 GPM (29 L/M)
	65 °F (36 °C) TEMP RISE		6.0 GPM (23 L/M)
	80 °F (44 °C) TEMP RISE		4.8 GPM (18 L/M)
	MINIMUM		NO MINIMUM REQUIRED

DIMENSIONS	17 1/4 IN (WD) X 38 IN (HD) X 38 IN (CD)	VENTING MATERIAL	INTAKE	PVC
WEIGHT	248 LBS		EXHAUST	PVC/CPVC/POLYPROPYLENE*
INSTALLATION TYPE	INDOOR	VENTING MAX LENGTH	3 IN	150 FT*
			2 IN	60 FT*
POWER SUPPLY	120 V AC, 60 HZ	HEAT EXCHANGERS	PRIMARY	STAINLESS STEEL
			SECONDARY	STAINLESS STEEL

*SEE PRODUCT MANUAL FOR DETAILS



ELIGIBLE FOR ENERGY EFFICIENCY REBATES



97%
AFUE
EF

DISCOVER THE GF200 ADVANCED FEATURES
NTICOMBIFURNACE.COM

CORPORATE HEADQUARTERS

30 STONEGATE DRIVE
SAINT JOHN, NB E2H 0A4
TOLL: 1-800-688-2575
DIRECT: 506-657-6000
EMAIL: INFO@NTIBOILERS.COM

