



Products you need
from people who care

FULL LINE CATALOG

We offer the widest range of high-efficiency hydronic heating and DHW products, designed around your needs.



GAS BOILERS | WATER HEATERS | COMBI FURNACES

For more information contact your local NTI representative or visit ntiboilers.com

TABLE OF CONTENTS

CONDENSING GAS BOILERS

Residential

- 08** TRX Combi
- 10** TRX Heat Only
- 12** Tx Combi
- 14** Tx Heat Only
- 16** FTV Combi
- 18** FTV Heat Only
- 20** Vmax Heat Only
- 22** Vmax Plus
- 24** TFT Series

Commercial

- 28** Lx Series
- 30** FTG Series

32 Boiler Selection Guide

WATER HEATING

- 36** Lx-WH Series
- 38** Trin & Stor
- 40** NTI Compact

COMBI FURNACES

- 44** GF200 Combi Furnace

OIL AND WOOD

- 48** Odyssey, Caprice, Triton, WF Series

ABOUT NTI BOILERS

We're NTI.
The partner you can trust.

We offer unmatched product quality and service. Our engineers strive to set new standards for high efficiency gas boilers, water heaters and combi furnaces.

NTI is an industry leader and we have been committed to providing smart climate solutions and personal customer support since we were founded in 1967. Today our head office and manufacturing facility are located on the stunning Drury Cove in Saint John, NB, a location chosen to delight those who visit us.

We are not only pioneers in the development of the most advanced and efficient central heating systems, but at NTI we listen to our customers and use their feedback to guide our innovation. Our knowledgeable, accessible friendly staff are here to support every customer to maximize product performance...and just make their jobs easier.

We love to hear your feedback! Contact us at

feedback@ntiboilers.com

to provide your opinion on our products and services

Acknowledged as a leader in research and product development, NTI manufactures its top-quality, hydronic products in accordance with the most advanced guidelines and industry codes. Its products are developed using state-of-the-art design and testing techniques.

The on-site laboratory and training facilities ensure to maintain NTI commitment to enduring quality, product development and contractor support.

Our customer service team, extended warranty programs and unique training opportunities underline our commitment to you. With NTI, you get quality, North American-made products and unparalleled support.

When you buy an NTI product, peace of mind is included.

The NTI brand is member of Ariston Thermo Group.

All over the world, Ariston Thermo is synonymous with comfort, energy efficiency and respect for the environment, thanks to its high efficiency products, its plants in compliance with the most advanced production standards and excellent pre- and after-sales customer support services.

The Group has now a leadership position in the global thermal comfort market for domestic, commercial and industrial spaces. The Group counts 7,000 employees and, in 2017, it reached 1.57 billion Euros in sales, produced 7 million products and allocated 79 million Euros to investments and R&D.

To know more about Ariston Thermo Group visit aristonthermo.com



Products you need
from people who care

CONDENSING GAS BOILERS

**THE RIGHT SOLUTION
FOR ANY APPLICATION**



CONDENSING GAS BOILERS FOR ANY NEED

CONDENSING GAS BOILERS

The NTI gas boilers lineup is the widest in the market, allowing our customers to find the right solution for any installation.

Our offering has been designed with our customers at the core of what we do. We are constantly using feedback from the field to guide our innovation. Over the years we have implemented continuous improvements and new features with one goal: your satisfaction.

Here are few of the features that make our boilers unique and allow us to make a difference when it comes to the installation and maintenance of our products:

Top condensing technology

As one of the pioneers to introduce high efficiency condensing boilers to North America, NTI designs only best in class products.

We use only high quality stainless steel heat exchangers to provide efficiency and reliability at the same time.

TOP
EFFICIENCY
PERFORMANCES

120V convenience outlet

Cost effective convenience. All NTI products come with a built-in 120V convenience outlet. You can use it to power a condensate pump or just to charge your phone!



Universal vent connections with embedded test port

Our vent connections include a combustion analyzer test port and can accommodate PVC/CPVC, PP and stainless steel pipes without the need for any adapters.



Legendary ignition

We are known for our quality startup. All NTI boilers are equipped with an external high-energy spark transformer to ensure proper ignition, each and every time.



Multi-unit cascade function

Connect up to 16 boilers with our integrated cascading function to easily meet even the most demanding installations. No optional devices required.

INTEGRATED
CASCADE
FUNCTION

Outdoor reset sensor included

We make sure you have the right components you need to install our boilers. Our outdoor reset sensor is high quality and field-tested (and is included!).



TFT

Supreme Fire Tube

The TFT is the top quality choice for both residential or light commercial applications.

From 60 to 399 MBH



Vmax

Highest value

Integrated and smart solutions that ensure quick and effective installation.

From 110 and 154 MBH
PLUS versions with built-in indirect tank



FTV

Fire Tube, made simple

High-efficiency, wall-hung fire tube boiler, peace of mind included.

From 110, 150 and 190 MBH
Combi available for all sizes



Tx

Proven design, easy maintenance

High-efficiency stainless steel heating boiler, easy to install and maintain.

From 57 to 199 MBH
Combi available for 150 and 199 MBH



TRX

Superior water tube design, with Wi-Fi

Improved water tube boiler design, with NTI Net connectivity.

From 85-120 MBH
Combi available 114 and 150 MBH

TRX COMBI

High efficiency heating in DHW and conductivity.

The TRX is the **advanced NTI platform, the new industry standard**, for Combi applications. The improved water flow design, and **Wi-Fi connectivity** makes the TRX the best choice available on the market.

This boiler provides superior performance for both space heating and domestic hot water, providing you all the heat you need in one compact and affordable package.

Available in two sizes:
114 MBH & 150 MBH

95% AFUE

Main Features:

- Innovative XTRATECH® Heat exchanger
- Integrated primary pump
- Modulating combustion up to 11:1
- Integrated ECM pump and DHW diverter valve

- Easy service access and quick component connections
- DHW flow switch and serviceable filter
- Vents in PVC, CPVC or poly propylene. Check with local jurisdictions

AHRI CERTIFIED

ASME

SP US

Low Lead Content

Field gas convertible
NG or LP

Outdoor reset

Cascade installation
up to 8


High-energy spark ignition

NTI



Dimensions

A	Central Heating Outlet
B	Domestic Hot Water Outlet
C	Gas Inlet
D	Domestic Hot Water Inlet
E	Central Heating Inlet
F	Condensate Drain
G	Electrical Connections

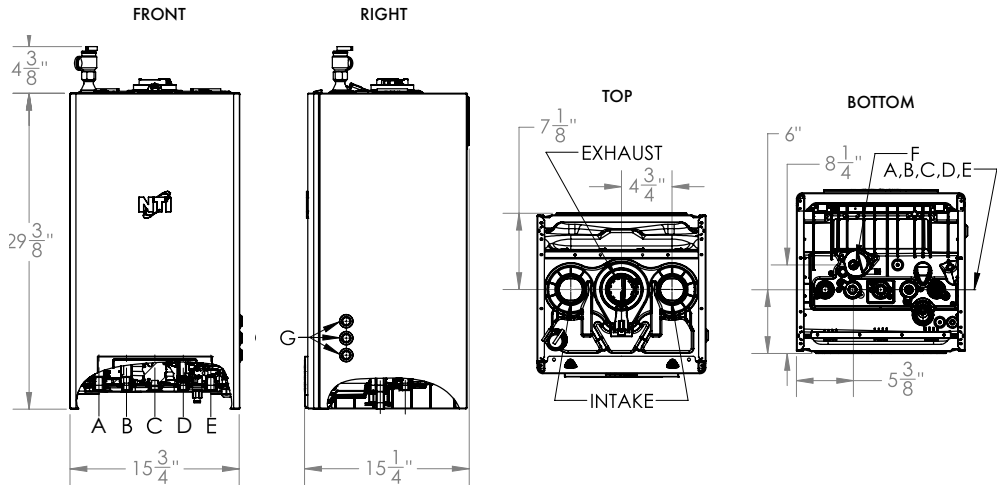

Specifications

	TRX110C	TRX150C
Input Heating	11.2-106 MBH	13.2 - 120 MBH
Input DHW	11.2-114 MBH	13.2 - 150 MBH
AFUE	95.5%	95%
Heating capacity	98 MBH	111 MBH
Net AHRI Rating	85 MBH	97 MBH
DHW Flow Rate at 77°F T Rise (Combi)	2.7 GPM	3.5 GPM
Weight	83.1 lbs	83.6 lbs
Water Content	1.2 gallons	
Gas Connection	3/4 in. NPT Male	
Water Connections (Heating)	1 in. sweat	
Water Connection (DHW)	3/4 in. sweat	
Air Inlet Connection	2 in. (max 100 ft)	
	3 in. (max 150 ft)	
Flue Connection	2 in. (max 100 ft)	
	3 in. (max 150 ft)	

Accessories:

- TRX series toolbox
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Tempering valve
- Boiler corrosion and limescale inhibitor

- Boiler system cleaner
- Water system descaler
- System water temperature sensor
- Room sensor thermostat
- Multizone controller

LIMITED LIFETIME / 5y PARTS WARRANTY

TRX HEAT ONLY

CONDENSING GAS BOILERS

The next level of water tube boilers.

The TRX is the **advanced NTI platform**, and the new **industry standard**, for heating boilers. The improved water flow design, and **Wi-Fi connectivity** makes the TRX the best choice available on the market.




This boiler provides both space heating and domestic hot water using an indirect water heater. The TRX provides an internal pump, and diverter valve, eliminating the need for an additional indirect pump and fittings.

Available in two sizes:
Combi available **85 MBH & 120 MBH**

95-96% AFUE

Main Features:


- Innovative XTRATECH® Heat exchanger
- Modulating combustion up to 9:1
- Integrated ECM pump and DHW diverter valve
- Easy service access and quick component connections
- Vents in PVC, CPVC or Polypropylene. Check with local jurisdictions




Field gas convertible
NG or LP

Outdoor reset


Cascade installation
up to **8***


 High-energy spark ignition





Dimensions

A	Central Heating Outlet
B	Domestic Hot Water Outlet
C	Gas Inlet
D	Domestic Hot Water Inlet
E	Central Heating Inlet
F	Condensate Drain
G	Electrical Connections

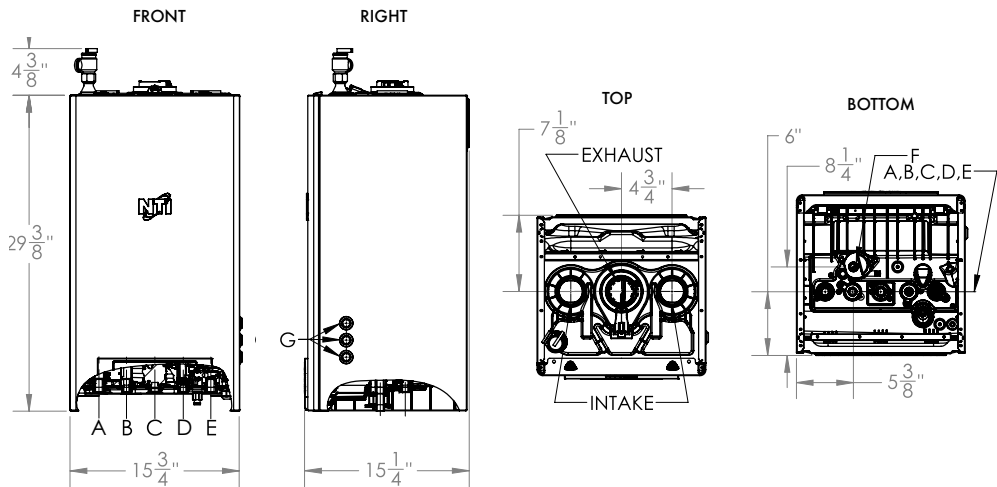

Specifications

	TRX085	TRX120
Input Heating	9.4 - 85 MBH	13.2-120 MBH
Input DHW		
AFUE	96%	95%
Heating capacity	79 MBH	111 MBH
Net AHRI Rating	69 MBH	97 MBH
DHW Flow Rate at 77°F T Rise (Combi)	N/A	N/A
Weight	78.5 lbs	84.4 lbs
Water Content	1.1 gallons	
Gas Connection	3/4 in. NPT Male	
Water Connections (Heating)	1 in. sweat	
Water Connection (DHW)	3/4 in. sweat	
Air Inlet Connection	2 in. (max 100 ft)	
	3 in. (max 150 ft)	
Flue Connection	2 in. (max 100 ft)	
	3 in. (max 150 ft)	

Accessories:

- TRX series toolbox
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Tempering valve
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Water system descaler
- System water temperature sensor
- Room sensor thermostat
- Multizone controller

LIMITED LIFETIME / **5y**
PRIMARY HEAT EXCHANGER PARTS
WARRANTY

TX COMBI

CONDENSING GAS BOILERS

High efficiency heating and DHW to meet the needs of the entire home.

The Tx Combi is the perfect choice for high efficiency water tube combination boiler applications. This boiler provides both **space heating** and **domestic hot water** in one single appliance, providing all the heat you need in one compact and affordable package. The boiler is equipped with a **primary loop pump** and **pre-assembled low loss header** to make installation easy and super fast. Eligible for energy efficiency rebates.

Available in two sizes:
151 MBH & 199 MBH

95% AFUE

Main Features:

- Low loss header manifold included
- Easy to clean stainless steel heat exchanger
- Integrated primary loop pump
- Universal vent connections with embedded test port
- DHW flow sensor with no moving parts
- Quick connect components
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible
NG or LP

Outdoor reset


Cascade installation
up to **16**

High-energy spark ignition


120V
Convenience Outlet




Dimensions

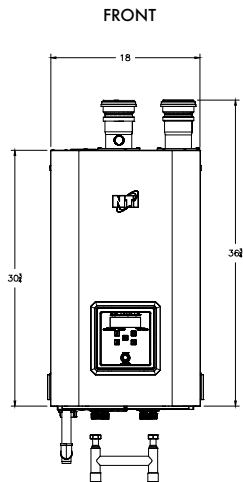

DIM	TOP	
	Tx151c	Tx200c
a	7 3/4"	5 1/4"
b	8 1/4"	7 1/4"
c	7 1/2"	7 3/4"
d	16"	17 1/4"

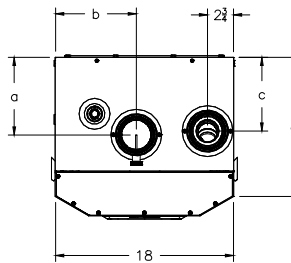

DIM	BOTTOM	
	Tx 51-151	Tx200
e	2 1/4"	1 1/2"
f	9"	8 3/4"
g	6 3/4"	7"
h	2 1/4"	1 1/2"

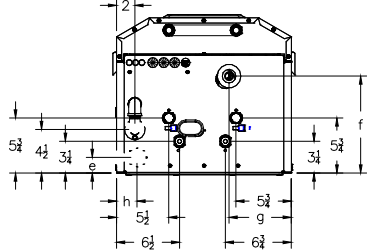

Specifications

		Tx151C		Tx200C	
Input Power	DHW	Natural Gas Propane	18.9 - 151 MBH	24.9 - 199 MBH	
	Heating	Natural Gas Propane	18.9 - 80 MBH	24.9 - 120 MBH	
AFUE			95%		
Heating capacity			74 MBH	111 MBH	
Net AHRI Rating			64 MBH	96 MBH	
DHW Flow Rate at 77°F T Rise			3.5 GPM	4.6 GPM	
Installation type			Indoor Wall Hung (rack available for floor standing installation)		
Weight			98 lb	120 lb	
Gas connection			½ in NPT female		
Water connections			1 in female (sweat joint)		
DHW connections			¾ in NPT male		
Air Inlet			2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 100 ft)	
Flue			2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 100 ft)	

Accessories:

- Tx Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Tempering valve
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor

LIMITED LIFETIME / 5y
PRIMARY HEAT EXCHANGER PARTS
WARRANTY

TX HEAT ONLY

CONDENSING GAS BOILERS

Efficiency and dependability that suits every application

The Tx high-efficiency stainless steel heating boiler is **easy to install and maintain**, and has **proven reliability by the most used and tested technology worldwide**. The **user-friendly programmable display**, fully packaged and wired assembly, and easy to clean heat exchanger make this unit a popular choice for homeowners and contractors.

The Tx essential design and its wide power range is the perfect choice for clean and simple instalations that keep costs under control.

Available in five sizes ranging from **57 MBH** to **199 MBH**

94% AFUE

Main Features:

- Easy to program display
- Easy to clean stainless-steel heat exchanger
- Quick connect components
- Universal vent connections with embedded test port
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible **NG or LP**

Outdoor reset

Cascade installation up to **16**

High-energy spark ignition

120V Convenience Outlet



Dimensions

FRONT

TOP

DIM	Tx51	Tx81	Tx101	Tx151	Tx200
a	8"	7 3/4"	6 1/2"	5"	5"
b	8 1/4"	8 1/4"	8 1/2"	8 1/2"	7 1/2"
c	4 3/4"	4 3/4"	4 3/4"	4 3/4"	8"
d	16"	16"	16"	16"	17 1/2"

BOTTOM

DIM	Tx 51-151	Tx200
e	7 3/4"	9"
f	7 1/2"	9"
g	6 3/4"	7"
h	4"	3 1/4"

Specifications

		Tx51	Tx81	Tx101	Tx151	Tx200
Input Power	Natural Gas Propane	7.1 - 57 MBH	10.3 - 82 MBH	12.6 - 101 MBH	18.9 - 151 MBH	24.9 - 199 MBH
AFUE		94%				
Heating capacity		52 MBH	75 MBH	92 MBH	139 MBH	184 MBH
Net AHRI Rating		45 MBH	65 MBH	80 MBH	120 MBH	160 MBH
Installation tyoe		Indoor Wall Hung (rack available for floor standing installation)				
Weight		77 lb	79 lb	86 lb	87 lb	98 lb
Gas connection		1/2 in NPT female				
Water connections		1 in NPT male				
Air Inlet		2 in (max 100 ft), 3 in (max 150 ft)				3 in (max 100 ft)
Flue		2 in (max 100 ft), 3 in (max 150 ft)				3 in (max 100 ft)

Accessories:

- Tx Series tool box
 - Floor stand
 - Low profile vent terminal
 - Concentric vent terminal
 - Boiler corrosion and limescale inhibitor
- Boiler system cleaner
 - Boiler system descaler
 - System water temperature sensor

LIMITED LIFETIME / 5y

PRIMARY HEAT EXCHANGER PARTS

WARRANTY

FTV COMBI

CONDENSING GAS BOILERS

Fire Tube Boilers Made Simple

The FTV is a high-efficiency, wall-hung boiler equipped with a **vertical fire tube heat exchanger** made of industry proven 439 stainless steel. NTI's user-friendly programmable display easy to access components and low loss header makes it **easy to install, set up and maintain**, while its unique design enables simpler plumbing layouts to **keep costs well under control**.

The FTV Combi has ample space heating capacity and adds abundant hot water to its repertoire, making it a great 2-in-1 appliance.

Available in three sizes:
110, 150 & 190 MBH

95% AFUE

Main Features:

- Low loss header manifold included
- Fire tube stainless steel heat exchanger
- Integrated primary loop pump
- Universal vent connections with embedded test port
- DHW flow sensor with no moving parts
- Quick connect components
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.
- 10:1 modulation

throughout book
Polypropylene is one word .. if on
separate line add -




Field gas
convertible
NG or LP

Outdoor reset


Cascade
installation
up to **16**

High-energy
spark ignition

120V
Convenience
Outlet

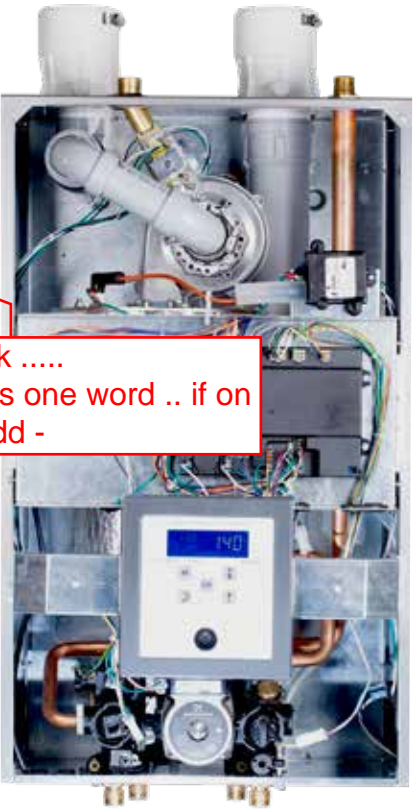

Dimensions

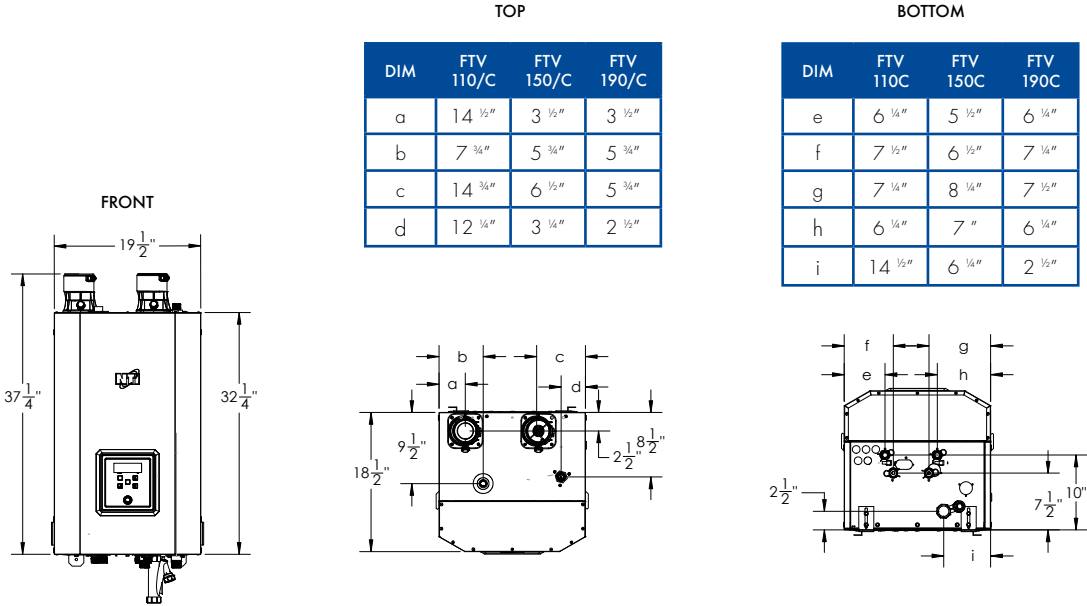

Specifications

	FTV110C	FTV150C	FTV190C
Input Heating and Power DHW (Combi) Natural Gas Propane	11 - 110 MBH	15 - 150 MBH	19 - 190 MBH
AFUE	95%		
Heating capacity	101 MBH	138 MBH	176 MBH
Net AHRI Rating	88 MBH	120 MBH	153 MBH
DHW Flow Rate at 77°F T Rise (Combi)	2.7 GPM	3.6 GPM	4.5 GPM
Installation type	Indoor Wall Hung (rack available for floor standing installation)		
Weight	88 lb	98 lb	120 lb
Gas connection	1/2 in NPT female		
Water connections	1 in female (sweat joint)		
DHW	3/4 in NPT male		
Air Inlet	2 in (max 100 ft), 3 in (max 150 ft)	2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)
Flue	2 in (max 100 ft), 3 in (max 150 ft)	2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)

Accessories:

- FTV Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Tempering valve
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor



FTV HEAT ONLY

CONDENSING GAS BOILERS

Fire Tube Boilers Made Simple

The FTV is a high-efficiency, wall-hung boiler equipped with a **vertical fire tube heat exchanger** made of industry proven 439 stainless steel. NTI's user-friendly programmable display and easy to access components makes it **easy to install, set up and maintain**, while its unique design enables simpler plumbing layouts to **keep costs well under control**.

The FTV's smart solutions and quality componentry ensure you **get the best value for money**.

Available in three sizes:
110, 150 & 190 MBH

95% AFUE

Main Features:

- Fire tube stainless steel heat exchanger
- Quick connect components
- Universal vent connections with embedded test port
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible
NG or LP

Outdoor reset


Cascade installation
up to **16**

High-energy spark ignition


120V
Convenience Outlet




Dimensions

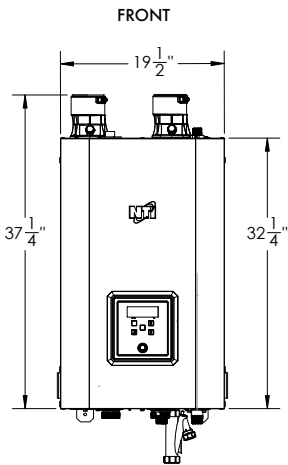

TOP			
DIM	FTV 110	FTV 150	FTV 190
a	14 1/2"	3 1/2"	3 1/2"
b	7 3/4"	5 3/4"	5 3/4"
c	14 3/4"	6 1/2"	5 3/4"
d	12 1/4"	3 1/4"	2 1/2"

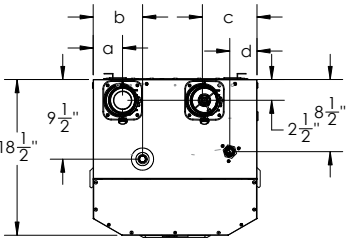

BOTTOM			
DIM	FTV 110	FTV 150	FTV 190
i	6 1/2"	7 1/2"	6 3/4"
k	2 1/4"	3 1/4"	2 1/2"
l	14 1/2"	6 1/4"	2 1/2"

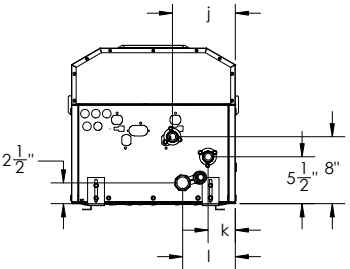

Specifications

		FTV110	FTV150	FTV190
Input Power	Natural Gas Propane	11 - 110 MBH	15 - 150 MBH	19 - 190 MBH
AFUE		95%		
Heating capacity		101 MBH	138 MBH	176 MBH
Net AHRI Rating		88 MBH	120 MBH	153 MBH
Installation type		Indoor Wall Hung (rack available for floor standing installation)		
Weight		88 lb	98 lb	120 lb
Gas connection		1/2 in NPT female		
Water connections		1 in NPT male		
Air Inlet		2 in (max 100 ft), 3 in (max 150 ft)	2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)
Flue		2 in (max 100 ft), 3 in (max 150 ft)	2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)

Accessories:

- FTV Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor



Vmax HEAT ONLY

High value integrated solutions that makes life easy

The Vmax Series is equipped with a high-performance down-fired fire tube stainless steel heat exchanger and have been designed to make installation, setup, and service easy. The dedicated indirect tank connections and integrated primary loop pump make the Vmax Series unique in the boiler industry, setting a new standard in terms of ease of installation and peace of mind. **Integrated and smart solutions** that ensure quick and effective installation, even for complex applications.

Available in two sizes:
110 MBH & 154 MBH

95% AFUE

Main Features:

- Built-in primary loop and circulating pump
- High performance fire tube stainless steel heat exchanger
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.
- Dedicated indirect tank connections
- Universal vent connections with embedded test port
- Easy to program display
- Quick connect components



Field gas convertible
NG or LP

Outdoor reset


Cascade installation
up to **16**

High-energy spark ignition

120V
Convenience Outlet



Dimensions

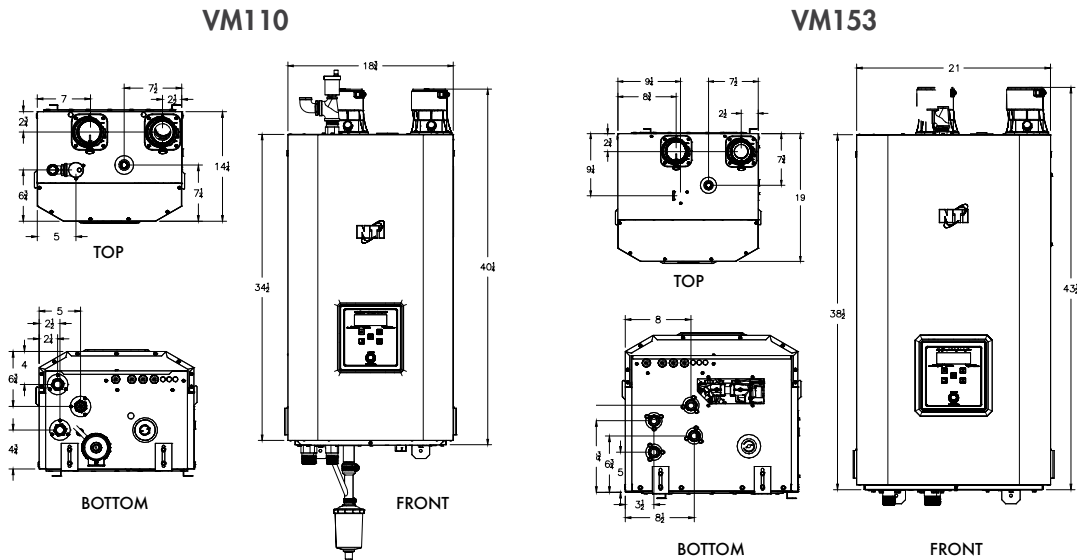

Specifications

		VM110	VM153
Input Power	Natural Gas	13.8 - 110 MBH	15.4 - 154 MBH
	Propane		
AFUE		95%	
Heating capacity		101 MBH	141 MBH
Net AHRI Rating		88 MBH	122 MBH
Installation type		Indoor Wall Hung (rack available for floor standing installation)	
Weight		110 lb	135 lb
Gas connection		½ in NPT female	
Water connections		1 in NPT male	
Air Inlet		2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)
Flue		2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)

Accessories:

- Vmax Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor



Vmax PLUS

CONDENSING GAS BOILERS

All the heat you need with unparalleled DHW comfort

The Vmax Plus is more than a Combi boiler. On the hot water side, it features an internal 16 gallon indirect tank to provide the best comfort experience to homeowners.

Forget about cold water sandwich and long waiting time: with Vmax Plus you will get plenty of hot water with the minimum effort. Comfort and dependability merge together, thanks to the stainless steel down-fired fire tube heat exchanger which ensures long product life and enduring performances.

The integrated smart solutions included in the Vmax Plus represent a unique offering in the market, **designed to make installation easy also in complex installations.**

Available in two sizes:
110 MBH & 154 MBH

95% AFUE

Main Features:

- Built-in primary loop and circulating pump
- High performance fire tube stainless steel heat exchanger
- Integrated stainless steel 16 gallon indirect tank
- Universal vent connections with embedded test port
- Easy to program display
- Quick connect components
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible
NG or LP

Outdoor reset


Cascade installation up to **16**

High-energy spark ignition

120V Convenience Outlet



Dimensions

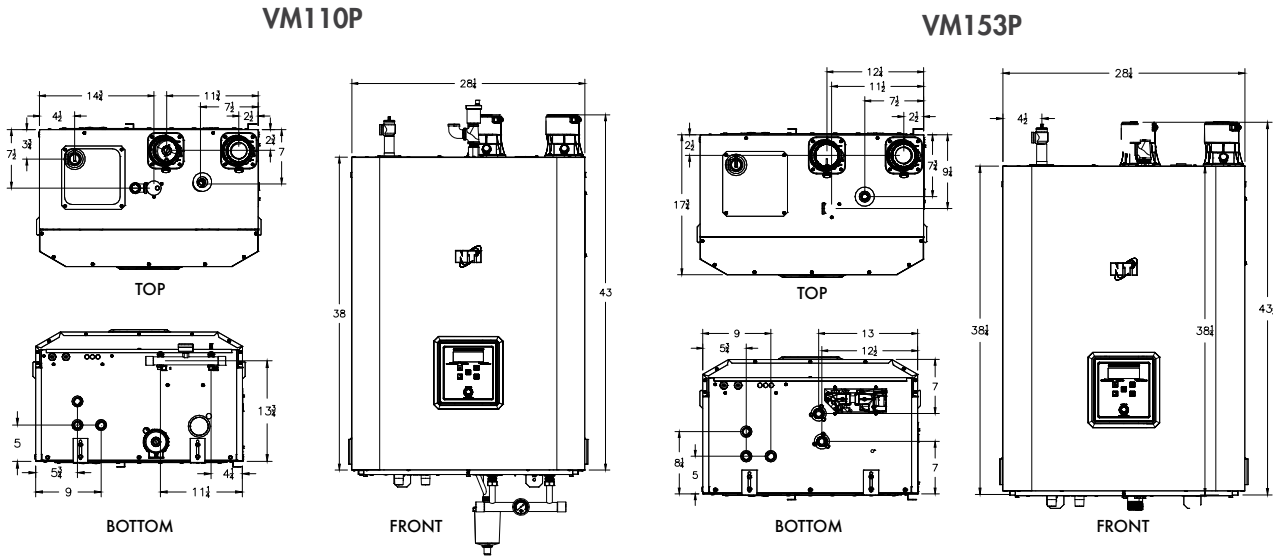

Specifications

			VM110P	VM153P
Input Power	DHW	Natural Gas Propane	13.8 - 110 MBH	15.4 - 154 MBH
	Heating	Natural Gas Propane	13.8 - 110 MBH	15.4 - 154 MBH
AFUE			95%	
Heating capacity			101 MBH	141 MBH
Net AHRI Rating			88 MBH	122 MBH
DHW Flow Rate at 77°F T Rise			2.6 GPM	3.6 GPM
Installation type			Indoor Wall Hung (rack available for floor standing installation)	
Weight			115 lb	140 lb
Gas connection			½ in NPT female	
Water connections			1 in female (sweat joint)	1 in NPT male
Air Inlet			2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)
Flue			2 in (max 100 ft), 3 in (max 150 ft)	3 in (max 150 ft)
DHW			¾ in NPT male	

Accessories:

- Vmax Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor



TFT SERIES

The supreme Fire Tube Boiler from 60 to 399 MBH

The TFT is the top quality choice for both residential or light commercial applications.

The high performance stainless steel down-fired fire tube heat exchanger and the **top and bottom stainless steel piping connections, offer supreme durability and flexibility of installation.**

The **touch screen display is user-friendly** and enables countless advanced settings, including cascade management and advanced boiler settings. The TFT reigns supreme with its **unique mix of outstanding performances and legendary reliability.**

Available in eight sizes ranging from: **60 MBH to 399 MBH**

95% AFUE

Main Features:

- Touch screen intuitive display
- High performance fire tube stainless steel heat exchanger
- Integrated low water cut-off
- Stainless steel internal piping and venting
- Top and bottom water connections
- Advanced cascade settings
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible
NG or LP

Outdoor reset

Cascade installation
up to **8**


High-energy
spark ignition

120V
Convenience
Outlet




Dimensions


FRONT					
DIM	60-110	154	201	285	340-399
i	33 1/2"	33 1/2"	33 1/2"	33 1/2"	36 1/2"
j	19 3/4"	19 3/4"	19 3/4"	21 1/4"	25"
k	37 3/4"	38 1/2"	37 3/4"	37 3/4"	40 1/2"

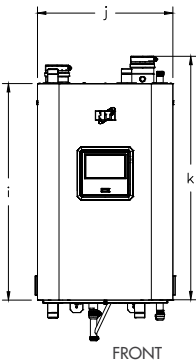

TOP					
DIM	60-110	154	201	285	340-399
a	6 3/4"	10 1/2"	10 1/2"	12 1/2"	14"
b	2 3/4"	2 3/4"	2 3/4"	3"	5 1/4"
c	6"	6"	2 1/2"	2 1/2"	20 3/4"
d	17"	15 1/2"	3 1/4"	3"	22 1/2"
e	17 3/4"	17"	3"	7 1/2"	20 3/4"
f	11 3/4"	16 1/2"	3"	4 3/4"	21"
g	1 1/2"	2"	1 1/2"	2"	2 3/4"
h	7 1/2"	10 1/2"	6"	6 1/4"	10 1/4"

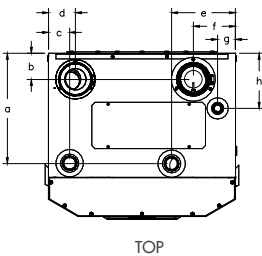

BOTTOM					
DIM	60-110	154	201	285	340-399
l	2"	2 3/4"	2 1/4"	2"	20 3/4"
m	10"	13 1/2"	13"	12 1/2"	14"
n	5 1/2"	8"	13 1/4"	13"	14"
o	7 1/2"	10 1/2"	6 1/2"	6 1/4"	12"
p	1 1/2"	2"	1 1/2"	2"	1 1/2"
q	17 3/4"	17"	3"	5 1/4"	19 1/2"

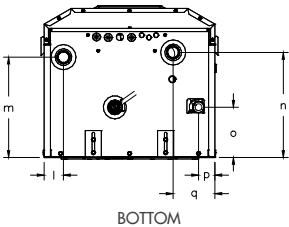

Specifications

		TFT60	TFT85	TFT110	TFT154	TFT201	TFT285	TFT340	TFT399
Input Power	NG	17 - 60 MBH	17 - 85 MBH	21.6 - 108 MBH	15.4 - 154 MBH	20 - 200 MBH	28.5 - 285 MBH	39.9 - 340 MBH	39.9 - 399 MBH
	LP	17.6 - 65 MBH	17.6 - 88 MBH	22.6 - 113 MBH					
AFUE		95%						95.4% Thermal Efficiency	
Heating capacity		56 MBH	78 MBH	99 MBH	141 MBH	185 MBH	263 MBH	324 MBH	380 MBH
Net AHRI Rating		48 MBH	68 MBH	86 MBH	122 MBH	160 MBH	228 MBH	282 MBH	330 MBH
Installation type		Indoor Wall Hung (rack available for floor standing installation)							
Weight		128 lb	128 lb	128 lb	170 lb	200 lb	200 lb	237 lb	247 lb
Gas connection		½ in NPT female					¾ in NPT male		
Water conn.		1 in NPT male				1 ¼ in NPT male		1 ½ in NPT male	
Air Inlet		2 in (max 100 ft*), 3 in (max 150 ft)			3 in (max 150 ft)			4 in (max 100 ft)	
Flue		2 in (max 100 ft*), 3 in (max 150 ft)			3 in (max 150 ft)			4 in (max 100 ft)	

* for LP: TFT60-85 max 35 ft, TFT110 max 25 ft

Accessories:

- TFT Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Common venting for TFT340/399
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor

LIMITED LIFETIME / **5y**
PRIMARY HEAT EXCHANGER PARTS
WARRANTY



Products you need
from people who care

COMMERCIAL CONDENSING GAS BOILERS

**ALL THE POWER
YOU NEED**



LX SERIES

CONDENSING GAS BOILERS

When you need more power we've got you covered

For light to heavy commercial applications, the Lx is the ideal option, with its easy to clean, **high power stainless steel heat exchanger**. The Lx Series boilers are designed for floor standing installation and can be also mounted wall-hung up to 399 MBH.

Its easy to access electronic board and well accessible components make it easy service and regular maintenance.

Cascade management and other outstanding programming features can be easily controlled by the intuitive touch screen display.

Available in eight sizes ranging from: 150 MBH to 800 MBH

94% Thermal Efficiency

Main Features:

- Touch screen intuitive display
- Easy cleaning stainless steel heat exchanger
- Wall hung kit included for Lx200-400
- High power sizes up to 800 MPH
- Easy access to the display and internal components
- Advanced cascade settings
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction.



Field gas convertible up to 500 NG or LP

Outdoor reset

Cascade installation up to 8

High-energy spark ignition



Dimensions Lx300-400

FRONT

DIM	300	400
a	39 3/4"	39 3/4"
b	17 1/4"	17 1/2"
c	36 1/4"	36 1/4"
d	11 3/4"	11 3/4"
e	9 1/2"	9 1/2"

FRONT

TOP

DIM	300	400
f	21 1/2"	24 1/2"
g	4 1/4"	4 1/4"
h	8 1/2"	8 1/2"
i	4 1/4"	4 1/4"
j	10 3/4"	16 1/2"

TOP

SIDE

DIM	300	400
k	24 1/2"	24 3/4"
l	2 3/4"	3 1/4"
m	7"	9 1/2"

SIDE

*Please refer to Lx Series Brouchure for dimension of Lx150-200 and Lx500-800

Specifications*

		Lx200	Lx300	Lx400	Lx500	Lx600	Lx800
Input Power	Natural Gas	25 - 199 MBH	55 - 275 MBH	75 - 399 MBH	100 - 500 MBH	120 - 600 MBH	160 - 800 MBH
	Propane					N/A	N/A
AFUE		93.5%	93.7%	94% Thermal Efficiency			
Heating capacity		181 MBH	251 MBH	375 MBH	470 MBH	564 MBH	752 MBH
Net AHRI Rating		157 MBH	218 MBH	326 MBH	409 MBH	490 MBH	654 MBH
Installation type		Indoor Floor Standing (Wall Hung kit included)			Indoor Floor Standing		
Weight		125 lb	180 lb	225 lb	320 lb	380 lb	475 lb
Gas connection		½ in NPT female	½ in NPT female	¾ in NPT female	¾ in NPT female	1 in NPT male	
Water connections		1 in NPT female	1 ¼ in NPT female	1 ¼ in NPT female	2 in NPT female		
Air Inlet		3 in (max 105 ft)	4 in (max 100 ft)				6 in (max 100 ft)
Flue		3 in (max 105 ft)	4 in (max 100 ft)				6 in (max 100 ft)

* Lx150 and Lx700 also available. Please refer to Lx Series Brochure for specifications

Accessories:

- Lx Series tool box
- Low profile vent terminal
- Concentric vent terminal
- Boiler corrosion and limescale inhibitor
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor

LIMITED LIFETIME / 5y

PRIMARY HEAT EXCHANGER PARTS

WARRANTY

FTG SERIES

CONDENSING GAS BOILERS

All the power you need for any commercial applications

The FTG is a **stainless steel high efficiency fire tube commercial boiler** that ranges from 800 MBH to 2,350 MBH.

The FTG features a dynamic **multiple heat exchanger design**, with single blower, gas valve and burner. The **user-friendly touch screen display** and **advanced programmable features** make it the ideal choice for dependable and highly demanding commercial applications.

The FTG Series has been designed to provide a reliable source of heat at the maximum energy efficiency levels, without compromises.

Available in six sizes ranging from: **800 MBH to 2,350 MBH**

Up to **96%** Thermal Efficiency

Main Features:

- Touch screen intuitive display
- High performance fire tube stainless steel heat exchanger
- Integrated low water cut-off
- Integrated combustion air filter

- CSD-1 compliant
- Advanced cascade settings
- Sealed cabinet
- Vents in PVC, CPVC or Polypropylene. Check with local jurisdiction.



Field gas convertible
NG or LP

Outdoor reset

Cascade installation
up to **8**

High-energy spark ignition

120V Convenience Outlet



Dimensions

FRONT

DIM	600-800	1200	1400	2000	2200-2400
k	68 1/4"	67"	67"	67 1/2"	67 1/2"
l	34"	34"	34"	34"	34"
m	61 3/4"	61"	61"	61 1/2"	61 1/2"

SIDE

DIM	600-800	1200	1400	2000	2200-2400
n	17 1/4"	67"	67"	67 1/2"	67 1/2"
o	44 1/2"	44 1/4"	44 1/4"	44 1/4"	44 3/4"
p	54 1/2"	54 1/4"	54 1/2"	53 1/2"	53 1/2"

TOP

DIM	600-800	1200	1400	2000	2200-2400
a	8 1/2"	11 1/2"	11 1/2"	11 3/4"	11 3/4"
b	8 1/2"	8 3/4"	8 3/4"	8 1/2"	8 1/2"
c	4"	5 1/2"	5 1/2"	5 3/4"	5 3/4"
d	7"	7"	7"	7"	7"
e	12 1/2"	12 1/4"	12 1/4"	12"	12"
f	13"	13"	13"	13"	13"
g	17"	17"	17"	17"	17"
h	11"	11"	11"	11"	11"
i	5"	5"	5"	5"	5"
j	29 1/4"	44 1/4"	44 1/4"	60 1/4"	60 1/4"

Specifications*

		FTG800	FTG1200	FTG1400	FTG2000	FTG2200	FTG2400
Input Power	Natural Gas	80 - 800 MBH	120 - 1,200 MBH	140 - 1,400 MBH	235 - 2,000 MBH	235 - 2,200 MBH	235 - 2,350 MBH
	Propane						
Thermal Efficiency		95%	96.1%	96%	96%	95.6%	95.2%
Heating capacity		760 MBH	1,153 MBH	1,344 MBH	1,920 MBH	2,103 MBH	2,237 MBH
Net AHRI Rating		660 MBH	1,003 MBH	1,169 MBH	1,670 MBH	1,829 MBH	1,945 MBH
Installation type		Indoor Floor Standing					
Weight		780 lb	1,210 lb		1,710 lb		
Gas connection		1 in NPT female	1 ¼ in NPT female		1 ½ in NPT male		
Water conn.	Inlet	3 in groove joint					
	Outlet	2 in groove joint	3 in groove joint				
Air Inlet		6 in (max 150 ft)	8 in (max 150 ft)				
Flue		6 in (max 150 ft)	8 in (max 150 ft)				

* FTG600 also available. Please refer to FTG Series Brochure for specifications

Accessories:

- FTG Series tool box
 - Low profile vent terminal
 - Concentric vent terminal
 - Boiler corrosion and limescale inhibitor
- Boiler system cleaner
 - Boiler system descaler
 - System water temperature sensor

LIMITED LIFETIME

PRIMARY HEAT EXCHANGER

WARRANTY

5y

PARTS

CONDENSING GAS BOILER SELECTION

This boiler selection guide is meant to provide a quick overview of the NTI wide product range. For detailed information about a specific product. Please see relevant product brochures and manuals or visit ntiboilers.com

	HEAT ONLY				
	TRX	Tx	FTV	Vmax	TFT
Max Power Input	85-120 MBH	57 - 199 MBH	110-190 MBH	110 - 154 MBH	60 - 399 MBH
Turn Down ratio	9:1	8:1	10:1	up to 10:1	up to 10:1
Efficiency	95% AFUE	94% AFUE	95% AFUE	95% AFUE	95% AFUE
Heat Exchanger	Stainless Steel Water Tube	Stainless Steel Water Tube	Stainless Steel Fire Tube	Stainless Steel Fire Tube	Stainless Steel Fire Tube
Boiler Controller		NTI Smart Push Button	NTI Smart Push Button	NTI Smart Push Button	NTI ifLEX Touch Screen
Combustion air intake	Sealed Cabinet	Direct connection	Direct connection	Direct connection	Direct connection
Internal piping material	Copper	Copper	Copper	Copper	Stainless Steel
Water connections	Bottom	Bottom	Bottom	Bottom	Top and Bottom
Cascade installation	√ (up to 8)	√ (up to 16)	√ (up to 16)	√ (up to 16)	√ (up to 8)
Propane conversion kit	√	√	√	√	√
Outdoor reset	√	√	√	√	√
Integrated Low Water Cut-off					√
Integrated primary Loop	√			√	
Integrated primary loop pump				√	
Integrated indirect tank circulation pump	√			√ (on VM153 only)	
Integrated indirect tank					
Dedicated indirect tank connections	√			√	√
High Voltage Spark Ignition	√	√	√	√	√
Integrated 120 V condensate pump receptacle		√	√	√	√
Warranty	Parts	5y	5y	5y	5y
	Heat Exchanger	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
Ideal for	Cost effective and reliable space heating residential applications	Cost effective and reliable space heating residential applications	Cost effective and reliable fire tube space heating residential applications	High value integrated components Fire Tube boiler for residential heating applications	High end Fire Tube boiler for residential or light commercial applications



Products you need
from people who care

		COMBI			
Lx	FTG	TRX COMBI	Tx COMBI	FTV COMBI	VMAX PLUS
150 - 800 MBH	800 - 2,400 MBH	114-150 MBH	DHW: 151 - 199 MBH Heating: 80 - 120 MBH	DHW: 110-190 MBH Heating: 110-190 MBH	110 - 154 MBH
up to 8:1	up to 10:1	up to 11:1	8:1	10:1	up to 10:1
93.5% AFUE / 94% T.E.	96% T.E.	95% AFUE	95% AFUE	95% AFUE	95% AFUE
Stainless Steel Water Tube	Stainless Steel Fire Tube	Stainless Steel Water Tube	Stainless Steel Water Tube	Stainless Steel Fire Tube	Stainless Steel Fire Tube
NTI ifLEX Touch Screen	NTI ifLEX Touch Screen		NTI Smart Push Button	NTI Smart Push Button	NTI Smart Push Button
Direct connection	Sealed Cabinet	Sealed Cabinet	Direct connection	Direct connection	Direct connection
N/A	N/A	Copper	Copper	Copper	Copper
Left	Rear	Bottom	Bottom	Bottom	Bottom
√ (up to 8)	√ (up to 8)	√ (up to 8)	√ (up to 16)	√ (up to 16)	√ (up to 16)
√ (except Lx600 - Lx800)	√	√	√	√	√
√	√	√	√	√	√
	√				
		√	√ (low loss header included)	√ (low loss header included)	√ (low loss header included for VM110P)
			√	√	√
		N/A	N/A	N/A	√
		N/A	N/A	N/A	√ (16 gal)
		N/A	N/A	N/A	N/A
√	√	√	√	√	√
	√		√	√	√
5y	5y	5y	5y	5y	5y
Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
Light to heavy commercial applications	Fire Tube boiler for commercial applications of any kind	Cost effective and reliable combination residential boiler	Cost effective and reliable combination residential boiler	Cost effective and reliable fire tube combination residential boiler	Combi application with unparalleled DHW comfort



Products you need
from people who care

WATER HEATING

**ENDLESS HOT WATER
FOR ANY APPLICATION**



LX-WH SERIES

Gas condensing volume water heater for commercial use

The Lx-WH combines quality with unmatched efficiency while providing a tremendous output capacity. The **high power stainless steel heat exchanger** is easy to clean and install. The **touch screen display is user friendly**, and the Lx-WH offers **advanced programming features**.

WATER HEATERS

Available in six sizes
ranging from: **199 MBH**
to **800 MBH**

96%
Thermal Efficiency

Main Features:

- Touch screen intuitive display
- Easy to clean stainless-steel heat exchanger
- Floor or wall-mount options
- Ideal coupling with Trin&Stor Storage tanks
- High power sizes up to 800 MBH
- Easy access to the display and internal components
- Advanced cascade settings



Field gas
convertible up to 500
NG or LP

Outdoor reset

Cascade
installation
up to **8**

High-energy
spark ignition



Dimensions

FRONT			TOP			SIDE		
DIM	300	400	DIM	300	400	DIM	300	400
a	39 3/4"	39 3/4"	f	21 1/2"	24 1/2"	k	24 1/2"	24 3/4"
b	17 1/4"	17 1/2"	g	4 1/4"	4 1/4"	l	2 3/4"	3 1/4"
c	36 1/4"	36 1/4"	h	8 1/2"	8 1/2"	m	7"	9 1/2"
d	11 3/4"	11 3/4"	i	4 1/4"	4 1/4"			
e	9 1/2"	9 1/2"	j	10 3/4"	16 1/2"			

FRONT			TOP			SIDE		

Specifications*

		Lx200WH	Lx300WH	Lx400WH	Lx500WH	Lx600WH	Lx800WH
Input Power	Natural Gas	25 - 199 MBH	55 - 275 MBH	75 - 399 MBH	100 - 500 MBH	120 - 600 MBH	160 - 800 MBH
	Propane					N/A	N/A
GPH at 100°F T Rise		229 GPH	317 GPH	460 GPH	576 GPH	691 GPH	922 GPH
Thermal Efficiency		96%					
Installation type		Indoor Floor Standing (Wall Hung kit included)			Indoor Floor Standing		
Weight		125 lb	180 lb	225 lb	320 lb	380 lb	475 lb
Gas connection		½ in NPT female	½ in NPT female	¾ in NPT female	¾ in NPT female	1 in NPT male	
Water connections		1 in NPT female	1 in NPT female	1 ¼ in NPT female	2 in NPT female		
Air Inlet		3 in (max 105 ft)	4 in (max 100 ft)				6 in (max 100 ft)
Flue		3 in (max 105 ft) 4 in (max 105 ft)	4 in (max 100 ft)				6 in (max 100 ft)

Lx700 WH also available

Accessories:

- Lx-WH Series tool box
- Floor stand
- Low profile vent terminal
- Concentric vent terminal
- Tempering valve
- Boiler system cleaner
- Boiler system descaler
- System water temperature sensor

5y / 5y
PRIMARY HEAT EXCHANGER PARTS
WARRANTY


TRIN & STOR TANKS

Highest quality stainless steel indirect water heaters and storage tanks

The Trin&Stor passivated steel **storage tanks** are renowned for **maximum resistance to corrosion, which increases their longevity**. Their **high-quality construction and components** make these storage tanks a popular product, and they come in a **wide range of sizes to fit any need**.



Dimensions

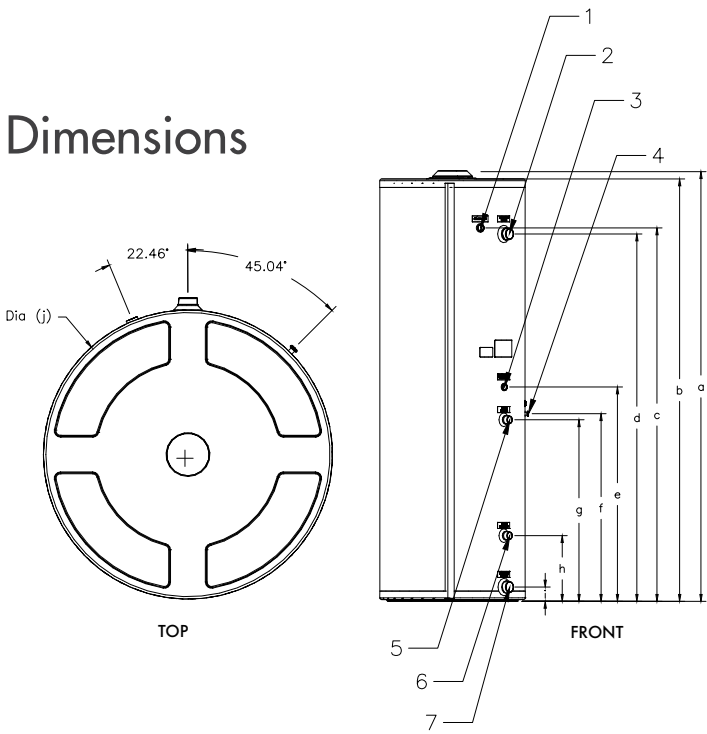

DIM	S40	S50	S65	S80	S120	ST80	ST120
a	56"	49"	70 1/2"	70 1/4"	—	—	—
b	54 3/4"	47 3/4"	69 1/4"	69"	64 3/4"	72 3/4"	65"
c	46 3/4"	39 3/4"	60 1/4"	61"	53 1/2"	59 1/2"	52 1/2"
d	46 3/4"	39 1/2"	60 1/4"	60"	53 3/4"	59 1/2"	52 1/2"
e	29"	29 1/2"	32 1/2"	35"	44 1/2"	10 3/4"	12 3/4"
f	25"	26"	27"	29 1/2"	40 1/2"	—	—
g	26"	27"	28"	30 1/2"	41 1/2"	11 1/2"	13 1/4"
h	9 1/2"	10"	10 1/4"	10 3/4"	12 1/4"	—	—
i	2"	2"	2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
j	20"	24"	22"	24"	29"	24"	29"
1	3/4" F	3/4" F	3/4" F	3/4" F	3/4" F	1" F	1" F
2	1" M	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
3	3/4" F	3/4" F	3/4" F	3/4" F	3/4" F	1 1/2" M	1 1/2" M
4	1" M	1" M	1" M	1" M	1" M	—	—
5	1" M	1" M	1" M	1" M	1" M	—	—
6	1" M	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
7	Well	Well	Well	Well	Well	Well	Well

Specifications

	INDIRECT WATER HEATERS						
	S40	S50	S65	S80	S120	ST80	ST120
Storage capacity	40 gal	53 gal	65 gal	79 gal	119 gal	79 gal	119 gal
Tank material	Stainless Steel					Stainless Steel	
Coil material	Stainless Steel					N/A	
Insulation	EPS Foam					EPS Foam	
Weight empty	71	90	100	115	157	160	175
Weight filled	485	655	800	995	1,275	1,040	1,293
Continuous recovery	140°F	228 gal	238 gal	288 gal	356 gal	485 gal	N/A
	115°F	303 gal	313 gal	401 gal	468 gal	636 gal	N/A
Boiler output	146 MBH	146 MBH	210 MBH	210 MBH	290 MBH	N/A	N/A
Coil flow rate	6.9 GPM	6.9 GPM	10.4 GPM	10.4 GPM	13.6 GPM	N/A	N/A
Coil pressure drop	0.5 PSI	0.5 PSI	1.5 PSI	1.5 PSI	2.1 PSI	N/A	N/A
Hour 1 recovery	140°F	196 GPH	196 GPH	292 GPH	292 GPH	392 GPH	N/A
	115°F	271 GPH	271 GPH	404 GPH	404 GPH	542 GPH	N/A

Accessories:

- Aquastat sensor

LIMITED
LIFETIME
WATER TANK

/ 1y
PARTS

WARRANTY

Available in three lines with sizes ranging from:
40 gallons to 120 gallons

Main Features:

- Stainless steel passivated construction
- Simple and quick aquastat connection
- Lead free
- High accuracy TPI control thermostat
- Widest product range from 40 to 120 gallons
- Highest quality construction

S/S
TANK

AQUASTAT
CONNECTION

TPI CONTROL
THERMOSTAT

LEAD
FREE

NTI COMPACT SERIES

Mini Tank Electric Water Heater

The **high quality and affordable price** of the NTI Compact mini tank electric water heater makes it the number one choice in over 1 million homes and businesses. **Easy to install**, it plugs into standard wall outlets and the Compact 6 version can be installed horizontally or vertically.

And as always, it comes with the NTI customer support and service that is second to none, as well as a **six-year tank limited warranty**.



Available in three sizes, from **2.7 gal** to **7.0 gal**

Main Features:

- Glass lined steel tank
- Special enamel with titanium content
- 4 bolts stainless steel
- heating element flange
- Magnesium sacrificial anode
- High accuracy and quick response capillary thermostat
- Temperature and pressure valve included



4

BOLTS
FLANGE

Ti

GLASS
LINED TANK

Mg

SACRIFICIAL
ANODE




HIGH ACCURACY
THERMOSTAT

Dimensions

NTI COMPACT 2.5 & 4"


Look at the manual for
NTI Compact 6 dimensions

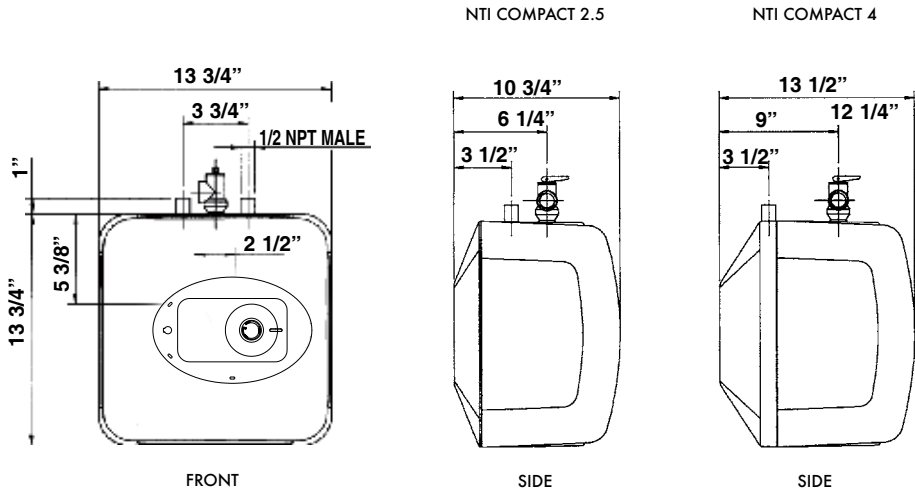

Specifications


MODEL	NTI COMPACT 2.5	NTI COMPACT 4	NTI COMPACT 6
Tank capacity	2.7 gal	4.0 gal	7.0 gal *
Dimensions	13 3/4" W x 13 3/4" H x 10 3/4" D	13 3/4" W x 13 3/4" H x 13 1/2" D	17 3/5" W x 17 3/5" H x 14 1/2" D
Weight (empty)	15.5 lbs	17.3 lbs	29.5 lbs
Maximum Water pressure	150 psi	150 psi	150 psi
Recovery rate at 90°F rise	6.8 gal/h	6.8 gal/h	6.8 gal/h
Temperature range	65 – 145 °F	65 – 145 °F	65 – 145 °F
Water connections	1/2" NPT	1/2" NPT	3/4" NPT
Relief valve	Installed	Installed	Included
Nominal Voltage (1 phase)	110/120 Vac	110/120 Vac	110/120 Vac
Nominal current	12 A	12 A	12 A
Power at 120 Vac	1,440 W	1,440 W	1,440 W
Electrical Connection	Plug-in	Plug-in	Hard wired
Sizing			

* 5.1 gal if installed vertically



POINT-OF-USE

- Single faucets
- Remote locations
- Single water lines



BOOSTER

- No waiting time
- Eliminates cold water sandwich
- No minimum flow rate requirement

6y/1y
INNER TANK PARTS
WARRANTY



Products you need
from people who care

COMBI FURNACES

EMBRACE A NEW
DIMENSION OF COMFORT



GF200 COMBI FURNACE

Modern Convenience of Hot Water and Forced Air Combined

The innovative GF200 is a unique Combi Furnace that offers a new dimension of comfort, **smart efficiency**, and energy savings. Its superior quality, **integrated and compact design**, featuring **two appliances in one**, allows for **fast installation and saves space**.

The GF200 is equipped with Green Furnace control technology features the most advanced components providing whisper quiet heating performance as well as quick and abundant hot water.

One size fits all

97% AFUE/EF

Main Features:

- Eligible for energy efficiency rebates
- Simultaneous operation of space heating and hot water
- 10-stage modulation for smooth temperature control
- Extremely quiet and efficient heat delivery

- Internal recirculation and buffer tank for quick hot water delivery
- Pairs with air conditioning and heat pumps
- Vents in PVC, CPVC or Poly Propylene. Check with local jurisdiction



97% AFUE/EF

S/SHEAT EXCHANGER

EMCMOTOR

LOW NOX

2IN1

New generation ECM motor and blower for whisper quiet performance.

Dimensions

FRONT
Height: 36.5 in [927mm]
Width: 17.7 in [450mm] (top), 19.6 in [498mm] (bottom)

SIDE
Height: 38.0 in [964mm]
Width: 37.2 in [944mm]
Depth: 6.4 in [162mm]
Bottom clearance: 12.9 in [328mm], 6.8 in [173mm], 9.3 in [236mm], 37.9 in [1008mm]

TOP
Width: 6.3 in [160mm]
Height: 10.9 in [276mm]
Bottom clearance: 10.5 in [266mm], 4.7 in [120mm]
Total width: 16.4 in [416mm]

Specifications

		SPACE HEATING	DOMESTIC HOT WATER
Heat Capacity (Input)	Natural Gas Propane	19,900 - 80,000 BTU/H	19,900 - 199,900 BTU/H
Energy Efficiency	AFUE	97.1%	
	UEF		0.96
	EF		0.97
Hot Water Flow Rate	50 °F (28 °C) Temp Rise		7.8 GPM (29 L/M)
	65 °F (36 °C) Temp Rise		6.0 GPM (23 L/M)
	80 °F (44 °C) Temp Rise		4.8 GPM (18 L/M)
	Minimum		NO MINIMUM REQUIRED
Dimensions	17¾ in (W) x 38 in (H) x 38 in (D)	Venting Material	Intake: PVC Exhaust: PVC/CPVC/polypropylene*
Weight	248 lbs	Venting Max Length	3 in: 150 ft* 2 in: 60 ft*
Installation Type	Indoor	Heat Exchangers	Primary: Stainless Steel
Power Supply	120 V AC, 60 Hz		Secondary: Stainless Steel

* See product manual for details

Accessories:

- plumbing connection kit (including tempering, relief and isolation valve)

8y / 5y

HEAT EXCHANGER / PARTS

WARRANTY

44

NTI

NTI

45



Products you need
from people who care

OIL AND WOOD BOILERS

WORRY-FREE COMFORT
PROVEN BY THE TEST OF TIME



OIL AND WOOD BOILERS

Odyssey

State-of-the-Art Cast Iron Oil Boiler

- Reliable cold-start operation
- Models ranging from 124,000 to 245,000 BTU/Hr
- Three-pass combustion path design generates outstanding performance
- Domestic hot water priority
- Outdoor Reset, Warm Weather Shutdown and Low Water Cut-Off
- Direct vent option
- Compact design with low clearances Simple installation and care

MODEL	INPUT GPH (US)	HEATING CAPACITY MBH	NET I=B+R RATING WATER MBH	AFUE EFFICIENCY %	WATER VOLUME (GAL)	WEIGHT (LBS)
CT-120	1.00	121	105	85.1%	5.4	350
CT-150	1.25	149	130	84.0%	5.4	350
CT-215	1.75	212	184	85.8%	7.3	468
CT-230	1.85	223	194	85.5%	7.3	468
CT-250	2.00	240	209	85.0%	7.3	468



SUPPLY AND RETURN SIZE	1 1/4" NPT
Stack Size	5"
Maximum allowable operating temperature °F	210 °F
Maximum allowable pressure	50 PSI

Caprice

Our most trusted steel oil boiler for over 50 years

- High efficiency operation, AFUE up to 86.9%
- High-capacity copper coil Outdoor reset and warm weather shutdown
- Domestic hot water priority Direct vent option
- Compact size and easy servicing

MODEL	INPUT GPH	GROSS OUTPUT BTU/H	NET OUTPUT BTU/H	AFUE
C85	.68	83,000	72,000	86.80%
C95	.75	91,000	79,000	86.50%
C105	.85	103,000	90,000	86.00%
C125	1	120,000	104,000	85.20%
CAPRICE COMMERCIAL				
C220	1.75	216,000	188,000	86.90%
C230	1.85	226,000	197,000	86.30%
C250	2	241,000	210,000	85.50%

MODEL	C85-125	C220-340
Stack Size (")	5	8
Water Volume (US Gal)	15	26
Shipping Weight (lbs)	362	440
Overall Length (")	20	23
Overall Width (")	20	23
Overall Height (")	36	42
Inlet/Outlet Size (Npt)	1 1/4	1 1/4
Relief Valve Size (Npt)	3/4	3/4
Drain Size (Npt)	1/2	1/2
Direct Venting	C95-125	—
Side Wall Venting (SSV-1)	C95-125	C220-305
Heating Surface (sq ft)	18	26
Standard Coil Size	S4	S4
Max. Coil Size	1-S5	1-S5
CRN Approved*	1279.7	1278.7



*Must request at time of order.

Triton

High Efficiency Hot Water Oil-Fired Heating Boiler.

- Efficient dry base boiler
- Unique water baffle design
- Raised flange tankless coil
- Easy servicing

MODEL	INPUT	GROSS OUTPUT (BTU)	NET OUTPUT (BTU)	EFFICIENCY	APPROX. WEIGHT (LBS)
VS 80	0.65	78,000	70,200	86%	417
VS 90	0.75	90,000	81,000	86%	417
VS 100	0.85	105,000	95,000	89%	417
VS 120	1.00	121,000	109,000	87%	417
VS 130	1.10	133,000	120,000	87%	417



WF Series

NTI WF Series is the most efficient, compact wood boiler on the market.

- Compact sizes eliminate the need for floor reinforcement
- Greater heating surface
- Lower stack temperature
- No boiler tubes
- Less possibility of cresol buildup
- Thermostat heat control
- Wet leg, high-efficiency boiler design
- Designed to A.S.M.E. requirements

DIM	1 1/4" NPT
	16"W
	25 1/2" D
SUPPLY	1 1/2"
RET	1 1/2"
RV	3/4"
DRAIN	1/2"
SQ. FT. SURFACE	20
WEIGHT	625 lbs.
WATER CAP	43 Imp Gal.
BTU CAPACITY	95,000



Join the pros! Participate in a training session today!

Contact us at:

training@ntiboilers.com

to get in touch with our training team and
learn about available dates in your area.



Interested in our products? Contact our Sales Managers:

Canada

VP of Sales Canada
Andrew Smith
asmith@ntiboilers.com

Atlantic Canada
Stacy Baskin
sbaskin@ntiboilers.com

Eastern Canada
Gloria Coelho
gcoelho@ntiboilers.com

Western Canada
Rob Johnston
rjohnston@ntiboilers.com

USA

VP of Sales USA
David Walsh
dwalsh@ntiboilers.com

North East
Ted Lowe
tlowe@ntiboilers.com

Mid Atlantic
Steve Wieland
skwieland@ntiboilers.com

Lakes East
David Miller
dmiller@ntiboilers.com

Lakes West
Cory VanVickle
cvanvickle@ntiboilers.com

US West
Shane Frandsen
sfrandsen@ntiboilers.com

ntiboilers.com

NTI Boilers Inc.
30 Stanegate Drive
Saint John NB E2H 0A4

info@ntiboilers.com
Toll: 1-800-688-2575
Direct: 506-657-6000



Products you need
from people who care

30 Stonegate Drive,
Saint John, NB
E2H 0A4

ntiboilers.com
info@ntiboilers.com

Toll: 1-800-688-2575
Direct: 506-657-6000